

LED TECHNOLOGY

50,000 Hours Life, 40/30/20 Watt, 120/277VAC 60Hz

Applications:

Parking Lots, Security Lighting, Ceiling Lighting

Features:

- Adjustable Wattage 40/30/20Watt
- Adjustable 3CCT 3000K, 4000K, 5000K
- Low Profile Design
- Aluminum Rust-Proof Body
- 120/277 Volt Input
- 0~10 Volt Dimmable
- Suitable For Wet Location

Accessories:

External Battery Backup



BK400OD



BK800OD

Internal Motion Sensor



ST-XS-MS


ADJUSTABLE LIGHT COLOR	
3000K	WARM WHITE
4000K	COOL WHITE
5000K	DAY LIGHT
ADJUSTABLE WATT	
40 WATTS	5,000 LUMENS
30 WATTS	3,750 LUMENS
20 WATTS	2,500 LUMENS



Specification:

Input Line Voltage:	120/277VAC
Input Power:	40W/30W/20W
Input Line Frequency:	60Hz
Lamp Life (Rated):	50,000hrs
Minimum Starting Temp:	-20°C/-4°F
Maximum Operating Temp:	45°C/113°F
CCT:	3000K/4000K/5000K
CRI:	≥80
Lumens:	5000/3750/2500
CBCP:	1100
Dimmable:	0-10V


Luminous Intensity Distribution Curve

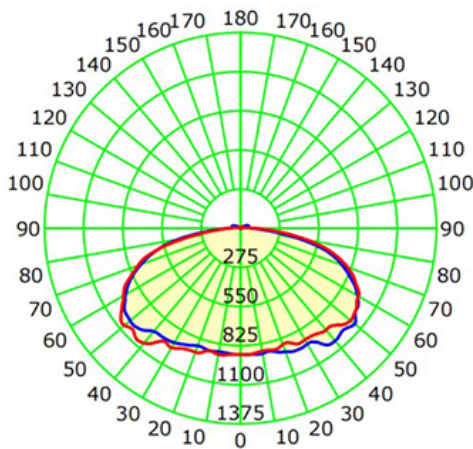

Unit: cd

Average Diffuse Angle(50%): 155.7°

— C0-C180 — C90-C270

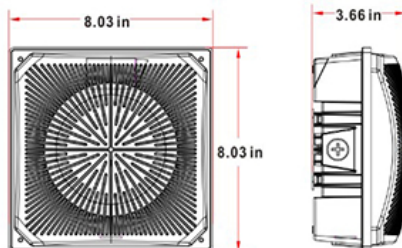

WARRANTY

* 5-YEAR

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	887.04	9.21/9.33	68.5	28.35
2.0	221.76	18.42/18.66	273.9	7.09
3.0	98.56	27.63/27.99	616.4	3.15
4.0	55.44	36.85/37.32	1095.8	1.77
5.0	35.48	46.06/46.65	1712.1	1.13
6.0	24.64	55.27/55.98	2465.4	0.79
7.0	18.10	64.48/65.30	3355.7	0.58
8.0	13.86	73.69/74.63	4383.0	0.44
9.0	10.95	82.90/83.96	5547.3	0.35
10.0	8.87	92.12/93.29	6848.5	0.28

Dv Beam Angle(B): H155.5 V155.8 Field Angle(F): H177.3 V178.0

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model:#	Description	wattage	lumens
LWP40CPF-D/CCT	40/30/20Watt Low Profile LED Canopy Light Bronze Color, Adjustable 3CCT	40W 30W 20W	5000 3750 2500

*Based on 5hours usage a day

UPC: 806802-153636

Cyber Tech Lighting, Inc.

331 S. Hale Ave. Fullerton, CA 92831 USA.

Tel: 714-870-0794, 1-877-60CYBER Fax: 714-870-0795

www.cybertechlighting.com



LW18-0223